

FINDING SOLUTIONS, NOT JUST IMAGINING

Bulk export supply of Portland cement, B500B/C steel rebar, scaffolding, gypsum & clay systems, MV/LV power cables, diesel generators, transformers, solar plants, and sanitary ware via DEKSACH d.o.o.

**APPLICABLE ENGINEERING, COMPLIANCE & QUALITY STANDARDS**

EN 197-1 Cement, BS 4449 / EN 10080 Rebar, EN 520 Plasterboard, IEC 60502 / IEC 60076 Electrical & Power Equipment

DIVISION PROFILE & SUPPLY ARCHITECTURE

Construction, Civil, Power & Electrical Materials

Designed for EPC contractors, public infrastructure tenders, utility authorities, and regional wholesale importers, DEKSACH d.o.o. consolidates certified heavy civil materials, architectural finishes, and power distribution equipment under unified CIF/FOB vessel chartering or containerized shipments.

Key Export & Engineering Highlights

- Breakbulk vessel and containerized bulk supply of CEM I/CEM II cement and B500B/C rebar
- Complete MV/LV power distribution: copper/aluminum cables, transformers, gensets, and solar
- Architectural finishing packages: gypsum plasters, clay roof tiles, sanitary ware, and piping
- Independent SGS / Bureau Veritas pre-shipment inspection coordinated by DEKSACH d.o.o.

Commercial & Logistics Execution

Contracting Desk:

DEKSACH d.o.o. (Zagreb, Hrvatska-Croatia)

Incoterms 2020:

EXW, FOB, CFR, CIF, DAP & Turnkey Project Delivery

Quality Assurance:

Independent SGS / Bureau Veritas / Intertek pre-shipment inspection

Settlement Structures:

Corporate Proforma, Irrevocable Documentary L/C, SBLC, or Escrow

VISUAL REFERENCE PORTFOLIO



PRODUCT LINES COVERED IN THIS CATALOG (14 EXPORT GROUPS)

01. White & Grey Portland Cement (CEM I / CEM II), Hydrated Li...
02. Ribbed Reinforcing Steel Rebar (B500B/B500C) & Galvanized...
03. Perforated Terracotta Clay Bricks, Clay Roof Tiles & Bitumen ...
04. Gypsum Plasters, Betokontakt Primer & Drywall Plasterboar...
05. Waterproofing Membranes, Paving Bitumen & Construction ...
06. Industrial Paints, Architectural Coatings & Polyurethane Seal...
07. uPVC Sewage Drainage & PPR Clean Hot/Cold Water Piping...
08. LV/MV Copper & Armored Power Cables, Switchgear & Sma...
09. Industrial Diesel Generators (15–2500 kVA) & Distribution Tr...
10. Solar PV Energy Kits, Solar CCTV Street Poles & Lattice GSM ...
11. uPVC Window & Door Systems, Porcelain Ceramics & Natur...
12. Vitreous China Sanitary Ware, Brass Mixers & Smart Water ...
13. Modular Kitchen & Bath Cabinetry, House Plans & Turnkey ...
14. IP/HD-TVI CCTV Surveillance Systems & Construction Site T...

CAT-04 / 01



CAT-04 • BINDERS & CHEMICALS

White & Grey Portland Cement (CEM I / CEM II),
Hydrated Lime & Calcium Carbide

Bulk and containerized export of White Portland Cement CEM I 52.5N/42.5R (85%+ whiteness), Grey Portland Cement CEM II 32.5R/42.5R, slaked plaster lime, and calcium carbide drums via DEKSACH d.o.o.

Export & Project Scope: Ready-mix concrete plants, precast architectural facade manufacturers, mortar/adhesive factories, civil infrastructure tenders, and industrial acetylene producers.

TECHNICAL SPECIFICATIONS

White Portland Cement	EN 197-1 CEM I 52.5N / 42.5R, ≥85% Hunter/ry whiteness, 25/50 kg craft bags & 1.5 MT sling bags
Grey Portland Cement	EN 197-1 CEM I 42.5R & CEM II/A-LL or B-M 32.5R / 42.5R in 50 kg bags & 1.5–2.0 MT jumbo bags
Hydrated Plaster Lime	EN 459-1 CL 80-S / CL 90-S high-purity slaked building & chemical lime in 25 kg bags
Calcium Carbide (CaC2)	50–80 mm / 25–50 mm industrial grade (≥295 L/kg gas yield) in UN-approved 50 kg / 100 kg steel drums
Shipment Modalities	20ft heavy-payload containers (27–28 MT) or 5,000–35,000 MT breakbulk vessel charters

KEY SUPPLY ADVANTAGES

- Moisture-protected shrink-wrapped palletized or jumbo sling-bag packaging for sea transit
- Consistent early and 28-day compressive strength verified by EN 197-1 mill test certificates
- UN-certified hazardous-cargo IMDG packing for industrial Calcium Carbide steel drums

Web Spec Sheet: <https://deksach.eu/product/portland-cement-lime-calcium-carbide/>

CAT-04 / 02



CAT-04 • STRUCTURAL STEEL & ACCESS

Ribbed Reinforcing Steel Rebar (B500B/B500C) &
Galvanized Scaffolding Systems

High-ductility B500B/B500C deformed reinforcing steel rebar (8 mm–32 mm in bundles and coils) alongside EN 12810/12811 hot-dip galvanized steel facade and shoring scaffolding via DEKSACH d.o.o.

Export & Project Scope: High-rise concrete towers, bridges, ports, dams, reinforced concrete prefabrication yards, and multi-story facade/formwork contractors.

TECHNICAL SPECIFICATIONS

Rebar Grades & Standards	B500B / B500C / ASTM A615 Gr.60 compliant with BS 4449, EN 10080, and DIN 488
Diameters & Formats	Ø 8 mm to Ø 32 mm (up to Ø 40 mm on order) in 12 m straight bundles (5.8 m/6 m container cut) & coils
Wire Mesh & Tie Wire	Welded steel reinforcing mesh sheets and annealed black/galvanized binding wire
Scaffolding Systems	EN 12810 / EN 12811 H-frame facade scaffolding, ringlock/cuplock modular access, steel planks & jacks
Quality Traceability	EN 10204 3.1 mill heat-number certificates with chemical & tensile/bend lab verification

KEY SUPPLY ADVANTAGES

- High-ductility Tempcore thermo-mechanically treated rebar engineered for seismic concrete structures
- Breakbulk mill-direct shipments (12 m bars) or containerized 5.8 m/folded-bar export options
- Hot-dip galvanized scaffolding frames with perforated anti-slip steel catwalks and toe-boards

Web Spec Sheet: <https://deksach.eu/product/reinforcing-steel-rebar-scaffolding/>

CAT-04 / 03



CAT-04 • MASONRY & ROOFING

Perforated Terracotta Clay Bricks, Clay Roof Tiles & Bitumen Shingles

Export-palletized perforated terracotta masonry clay bricks, interlocking natural clay roof tiles, SBS/APP fiberglass bitumen roof shingles, and breathable roof membranes supplied by DEKSACH d.o.o.

Export & Project Scope: Residential villa estates, Mediterranean and continental pitched-roof housing, commercial masonry walls, heritage restorations, and wholesale building depots.

TECHNICAL SPECIFICATIONS

Masonry Clay Bricks	EN 771-1 horizontal/vertical perforated thermal terracotta blocks & facing bricks
Natural Clay Roof Tiles	EN 1304 kiln-fired Marseilles, Mediterranean, and flat interlocking tiles + ridge accessories
Bitumen Roof Shingles	EN 544 fiberglass-reinforced APP/SBS oxidized bitumen shingles with mineral basalt granules
Waterproofing Underlay	SBS/APP torch-on bituminous membranes (3–4 mm) and vapor-permeable roof underlayments
Export Packaging	Fumigated ISPM-15 wooden pallets with corner guards and heavy shrink-hood wrapping

KEY SUPPLY ADVANTAGES

- Frost-resistant, low-water-absorption kiln-fired terracotta tiles with 50+ year colorfastness
- Lightweight UV-resistant mineral-granule bitumen shingles ideal for timber and light-steel roofs
- Complete roof system consolidation including ridge caps, valleys, vents, and waterproofing

Web Spec Sheet: <https://deksach.eu/product/clay-bricks-roof-tiles-shingles/>

CAT-04 / 04



CAT-04 • DRYWALL & PLASTERS

Gypsum Plasters, Betokontakt Primer & Drywall Plasterboard Systems

Full interior dry-lining and plaster range: perlite hand plaster, machine projection plaster, satin finish, joint/cornice compounds, Betokontakt 404 binder, and EN 520 gypsum plasterboards via DEKSACH d.o.o.

Export & Project Scope: High-rise residential towers, hotels, hospitals, commercial office fit-outs, shopping malls, and regional drywall wholesale distributors.

TECHNICAL SPECIFICATIONS

Bagged Gypsum Plasters	EN 13279-1 Perlite hand plaster, machine spray plaster, satin finishing, joint & molding gypsum (25/30 kg)
Surface Bonding Primer	Betokontakt 404 polymer-modified quartz-aggregate adhesion primer for smooth concrete ceilings/columns
Gypsum Plasterboards	EN 520 Standard (Type A), Moisture-Resistant Green (H2), Fire-Rated Pink (DF), & EPS/XPS-laminated boards
Board Dimensions	9.5 mm, 12.5 mm, and 15 mm thicknesses in 1200 × 2400 / 2500 / 3000 mm tapered-edge sheets
Drywall Accessories	Galvanized C/U studs & tracks (0.45–0.60 mm), suspended ceiling T-grids, fiberglass tape & drywall screws

KEY SUPPLY ADVANTAGES

- High-purity natural white gypsum deposits yielding smooth, crack-free mirror satin wall finishes
- Complete system compatibility combining boards, galvanized framing, primers, and joint compounds
- Moisture-barrier PP-laminated kraft bags preserving plaster shelf life in humid export climates

Web Spec Sheet: <https://deksach.eu/product/gypsum-plaster-plasterboard-systems/>



WATERPROOFING & BITUMEN

Waterproofing Membranes, Paving Bitumen & Construction Mortars

Comprehensive export supply of APP and SBS modified bituminous roll waterproofing membranes, EN 12004 C2TE/C1T cementitious ceramic tile adhesives, EIFS thermal insulation board mortars, AAC gas concrete adhesives, and road paving bitumen drums (60/70 & 80/100) coordinated through the DEKSACH d.o.o. European Union trade desk.

Export & Project Scope: Foundation, podium, bridge-deck, and flat-roof bituminous waterproofing rolls, polymer-modified dry-mix construction mortars, autoclaved aerated concrete masonry adhesives, and containerized steel-drum penetration bitumen for highway and civil EPC contractors.

TECHNICAL SPECIFICATIONS

Bituminous Roll Membranes	APP (-5°C to -10°C) & SBS (-20°C) modified, 3.0–4.5 mm, spunbond polyester or fiberglass carrier (EN 13707)
Tile & Masonry Mortars	EN 12004 C1T standard & C2TE S1 high-performance flexible ceramic/porcelain adhesives, AAC gas concrete block mortar
Thermal Insulation Mortars	Polymer-modified EPS/XPS/rockwool bonding & fiber-reinforced surface plastering mortars for ETICS facades
Road Paving Bitumen	Penetration Grade 60/70 & 80/100 (ASTM D946 / EN 12591) in new 180 kg–200 kg steel drums or Jumbo Bitutainers
Export Packaging & Compliance	CE-marked shrink-wrapped pallets & SGS/Intertek inspected export container loads (20ft heavy-duty FCL)

KEY SUPPLY ADVANTAGES

- Torch-on APP plastomeric and SBS elastomeric membranes with PE film, fine sand, or UV-resistant mineral slate finish
- High-adhesion C2TE/C1T tile mortars, EIFS facade plastering systems, and precision thin-bed AAC block adhesives
- Refinery-certified Penetration 60/70 and 80/100 paving-grade bitumen in leak-proof export steel drums

Web Spec Sheet: <https://deksach.eu/product/waterproofing-membranes-bitumen-chemicals/>



COATINGS & PU SEALANTS

Industrial Paints, Architectural Coatings & Polyurethane Sealants

Export-grade interior and exterior architectural emulsions, alkali-resistant primers, crack-bridging elastomeric facade coatings, industrial anti-corrosive paints, and one-component polyurethane construction sealants and structural adhesives technically equivalent to Sikaflex 221, 227, and 252 supplied by DEKSACH d.o.o.

Export & Project Scope: Residential and commercial facade coatings, washable interior acrylic/silicone paints, epoxy floor and steel primers, and high-modulus polyurethane joint sealants and body/panel bonding adhesives for construction, modular building, and industrial OEM buyers.

TECHNICAL SPECIFICATIONS

Architectural Coatings	Interior breathable matte/satin acrylics, UV-stable silicone exterior paints & elastomeric crack-bridging coatings
Primers & Industrial Paints	Deep-penetrating mineral primers, zinc-phosphate anti-rust alkyds & two-pack industrial epoxy floor/steel coatings
PU Sealant Equivalents	1C moisture-curing polyurethane sealants & structural adhesives matching Sikaflex 221, 227 & 252 performance profiles

KEY SUPPLY ADVANTAGES

- Tropical-UV and humidity-resistant exterior facade coatings formulated for European, Mediterranean, and African climates
- High-strength polyurethane joint sealants and elastic structural adhesives equivalent to Sikaflex 221/227/252 standards
- Low-VOC interior architectural finishes, mineral primers, and heavy-duty industrial protective coatings

Web Spec Sheet: <https://deksach.eu/product/industrial-paints-sealants-chemicals/>



PLUMBING & INFRASTRUCTURE

uPVC Sewage Drainage & PPR Clean Hot/Cold Water Piping Systems

Complete thermoplastic fluid-conveyance packages including SN4/SN8 uPVC underground sewage and building wastewater drainage pipes, DIN 8077/8078 PP-R PN16/PN20 clean hot and cold potable water pipes, brass-insert fittings, valves, and HDPE compression fittings delivered worldwide via DEKSACH d.o.o.

Export & Project Scope: Municipal sewer mains, stormwater networks, multi-story building soil and waste stacks, pressurized hot/cold domestic plumbing risers, and agricultural/utility compression fittings.

TECHNICAL SPECIFICATIONS

uPVC Wastewater & Sewer Pipes	EN 1401 underground SN4 / SN8 (Ø110–Ø630 mm) & EN 1329 building drainage (Ø50–Ø200 mm) with EPDM lip seals
PPR Clean Water Pipes	100% virgin PP-R Type 3 (DIN 8077/8078 / ISO 15874), PN16 & PN20, plain & glass-fiber composite (Ø20–Ø160 mm)
Valves & Brass Fittings	CW617N nickel-plated brass threaded PPR inserts, PPR ball/concealed stop valves, check valves & unions
Compression & Auxiliary Line	PN16 PP compression couplings, elbows, tees, saddle clamps & PE100 service connections
Potable Water Hygiene	Odorless, corrosion-free, scale-resistant inner bore certified for 50-year service life at 20°C / 70°C continuous duty

KEY SUPPLY ADVANTAGES

- Ring-stiffness certified SN4 and SN8 uPVC gravity sewer pipes with leak-tight elastomeric socket joints
- Glass-fiber reinforced PN20 PPR hot-water pipes minimizing linear thermal expansion in high-rise risers
- Full-system compatibility with matching socket-fusion fittings, brass transition pieces, and heavy-duty valves

Web Spec Sheet: <https://deksach.eu/product/pvc-ppr-clean-wastewater-pipes/>



ELECTRICAL & METERING

LV/MV Copper & Armored Power Cables, Switchgear & Smart Meters

Electrolytic copper and steel-armored LV/MV power and installation cables (NYY, NYFGBY, halogen-free N2XH / N2XH FE180, NYM, NHXHM, TTR, NYA, H07Z1-U/K), cable trunking, modular switches and sockets, MCB/MCCB circuit breakers, and single-phase & three-phase smart digital electricity meters sourced through DEKSACH d.o.o.

Export & Project Scope: Underground utility feeders, hospital/airport fire-safe LSZH wiring, commercial building distribution boards, domestic wiring accessories, and utility/sub-metering AMR/AMI smart electricity metering deployments.

TECHNICAL SPECIFICATIONS


Power & Armored Cables	NYY (0.6/1 kV), galvanized flat-steel wire/tape armored NYFGBY, MV XLPE cables up to 36 kV (IEC 60502 / VDE 0276)
Halogen-Free & Building Wire	LSZH N2XH, fire-integrity N2XH FE180 (IEC 60331), NHXHM, NYM, TTR flexible cords, NYA & H07Z1-U/K Class 1/2/5 Cu
Switchgear & Protection	DIN-rail MCBs (6 kA / 10 kA), RCCB/RCBO residual current devices, MCCBs, sheet-steel & IP65 enclosures
Wiring Devices & Trunking	Flush & IP54 surface switches/sockets, PVC slotted/solid cable trunking, rigid/corrugated

KEY SUPPLY ADVANTAGES

- 99.9% pure electrolytic Annealed Copper (IEC 60228) conductors with routine spark, voltage, and flame-retardancy testing
- LSZH halogen-free N2XH and FE180 circuit-integrity cables engineered for public infrastructure, tunnels, and hospitals
- Complete low-voltage panel protection packages, architectural switch series, and heavy-duty cable management

Web Spec Sheet: <https://deksach.eu/product/power-cables-electrical-switchgear-meters/>

CAT-04 / 09

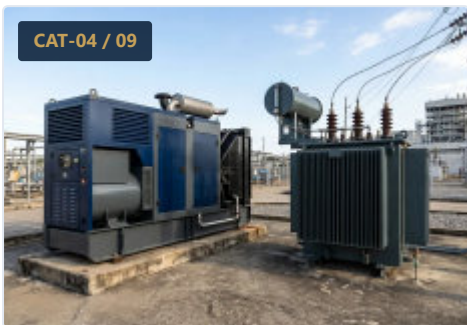

POWER GENERATION & GRID

Industrial Diesel Generators (15–2500 kVA) & Distribution Transformers

Heavy-duty soundproof canopy and containerized diesel generator sets from 15 kVA to 2500 kVA alongside pole-mounted and ground-pad three-phase oil-immersed distribution transformers engineered for continuous prime power, standby backup, and MV/LV utility grid expansion via the DEKSACH d.o.o. European Union trade desk.

Export & Project Scope: Industrial plants, hospitals, telecom hubs, mining camps, commercial towers, rural electrification grids, and turnkey substation transformer-genset packages.

TECHNICAL SPECIFICATIONS

Diesel Generator Range	15 kVA to 2500 kVA (50 Hz / 60 Hz, 1500/1800 RPM) Prime & Standby ratings per ISO 8528
Acoustic Canopy & Control	Weatherproof galvanized sound-attenuated canopy (68–75 dBA @ 7m), base fuel tank, PLC controller & motorized ATS panel
Distribution Transformers	Three-phase oil-immersed hermetically sealed (corrugated fin) or conservator type, 50 kVA – 2500 kVA (IEC 60076)
Voltage Levels & Windings	Primary 11 kV / 15 kV / 20 kV / 22 kV / 33 kV to Secondary 400V–415V, electrolytic Cu or Al windings, off-circuit tap changer
Mounting & Testing	Overhead pole-mounted & ground substation skid designs; routine FAT dielectric, no-load & load-loss test certificates

KEY SUPPLY ADVANTAGES

- World-class water-cooled diesel engines coupled with brushless AVR Class-H tropicalized synchronous alternators
- Automatic mains-failure (AMF/ATS) changeover and multi-genset parallel synchronization panels for critical facilities
- Low-loss grain-oriented CRGO silicon steel core oil-immersed distribution transformers built to IEC 60076 standards

Web Spec Sheet: <https://deksach.eu/product/diesel-generators-distribution-transformers/>

CAT-04 / 10



SOLAR & TELECOM TOWERS

Solar PV Energy Kits, Solar CCTV Street Poles & Lattice GSM Towers

Complete off-grid and hybrid residential/commercial solar PV power kits, MPPT hybrid inverters, LiFePO4 lithium and deep-cycle gel battery banks, autonomous solar wireless CCTV LED street poles, and hot-dip galvanized lattice GSM telecom towers delivered globally by DEKSACH d.o.o.

Export & Project Scope: Off-grid rural electrification, commercial rooftop & hybrid microgrids, telecom BTS solar power plants, smart municipal solar surveillance lighting, and 3-legged/4-legged angular or tubular GSM lattice tower structures.

TECHNICAL SPECIFICATIONS

Solar PV Modules & Inverters	Tier-1 Monocrystalline PERC / N-Type TOPCon 450W–670W panels; 3 kW–100 kW hybrid & off-grid MPPT pure-sine inverters
Energy Storage Banks	48V LiFePO4 rack/wall lithium batteries (>6,000 cycles, BMS) & maintenance-free VRLA deep-cycle solar gel batteries
Solar CCTV Street Poles	6 m–12 m conical/octagonal galvanized poles with high-lumen LED luminaire, solar panel, LiFePO4 pack & 4G/Wi-Fi PTZ camera
Lattice GSM Telecom Towers	18 m–90 m self-supporting 3/4-legged & guyed steel lattice towers, S355JR structural steel, wind-

KEY SUPPLY ADVANTAGES

- Pre-engineered plug-and-play residential and commercial off-grid/hybrid solar packages with DC/AC surge protection
- Zero-trenching autonomous solar LED street poles with integrated 4G wireless IP surveillance for roads and perimeters
- CNC-fabricated hot-dip galvanized GSM/LTE/5G lattice telecom towers shipped flat-packed in 40ft containers with anchor bolts

Web Spec Sheet: <https://deksach.eu/product/solar-energy-systems-gsm-towers/>



JOINERY, TILES & STONE

uPVC Window & Door Systems, Porcelain Ceramics & Natural Marble

Architectural building envelope and interior finishing supply featuring multi-chamber uPVC window and door systems with double/triple insulated glazing, glazed porcelain and ceramic floor/wall tiles, hygienic faience, and natural Turkish and European marble slabs coordinated by DEKSACH d.o.o.

Export & Project Scope: Custom-sized ready-to-install uPVC casement, tilt-and-turn, and sliding fenestration, profile bars for local fabricators, rectified porcelain flooring, wet-area wall faience, and polished/honed natural marble slabs and cut-to-size stone.

TECHNICAL SPECIFICATIONS

uPVC Profile & Glazing Systems	5 to 7-chamber 70 mm–82 mm UV-stabilized Class-A/B profiles (EN 12608), galvanized steel reinforcement, 24–44 mm Low-E argon IGU
Opening & Hardware Configurations	Tilt-and-turn, casement, sliding, folding & entrance doors with multi-point espagnolette locks & EPDM weather seals
Porcelain & Ceramic Tiles	EN 14411 Bla glazed/full-body porcelain (<0.5% water absorption, 60x60 / 60x120 cm) & ceramic wall faience (30x60 / 30x90 cm)
Natural Marble & Travertine	2 cm & 3 cm polished, honed or brushed slabs, cut-to-size tiles, stair treads & window sills (Turkish & European quarries)
Export Crating	Fumigated ISPM-15 wooden A-frames and reinforced bundles for slabs/windows; shrink-wrapped heavy-duty tile pallets

KEY SUPPLY ADVANTAGES

- High thermal and acoustic insulation uPVC window and door units custom-manufactured to architectural window schedules
- Tropical TiO₂-stabilized white and woodgrain-laminated uPVC profiles resistant to intense UV discoloration
- First-choice rectified porcelain floor tiles, anti-slip terrace ceramics, and designer bathroom faience collections

Web Spec Sheet: <https://deksach.eu/product/upvc-windows-doors-ceramics-marble/>



SANITARY & WATER METERING

Vitreous China Sanitary Ware, Brass Mixers & Smart Water Meters

High-fired vitreous china washbasins, rimless wall-hung and close-coupled WC suites, solid brass chrome basin and sink mixers, rain shower sets, and ISO 4064 brass mechanical and prepaid smart-card water meters supplied for residential, hotel, and municipal tenders via DEKSACH d.o.o.

Export & Project Scope: Housing developments, hotels, hospitals, commercial washrooms, and municipal water utility metering upgrades across European, Middle Eastern, and African markets.

TECHNICAL SPECIFICATIONS


Vitreous China Sanitary Ware	EN 997 / EN 14688 high-glaze (<0.5% absorption) rimless wall-hung WCs, dual-flush 3/6L close-coupled suites, pedestal & countertop basins
Brass Faucets & Mixers	CW617N (EN 12165) solid brass body, Ni-Cr mirror plating, 35 mm/40 mm ceramic disc cartridges & water-saving Neoperl aerators
Shower Systems & Accessories	Thermostatic & mechanical rain shower columns, concealed shower valves, bidet sprayers & stainless bathroom accessories
Mechanical Water	Single-jet, multi-jet (dry/wet dial) & Woltmann

KEY SUPPLY ADVANTAGES

- Hygienic stain-resistant rimless WC suites paired with silent dual-flush cisterns and soft-close duroplast seats
- Corrosion-tested chrome-plated brass mixers engineered for long lifecycle durability in hospitality and housing projects
- Tamper-resistant brass mechanical and prepaid smart-card water meters enabling accurate utility revenue protection

Web Spec Sheet: <https://deksach.eu/product/sanitary-ware-faucets-water-meters/>

CAT-04 / 13

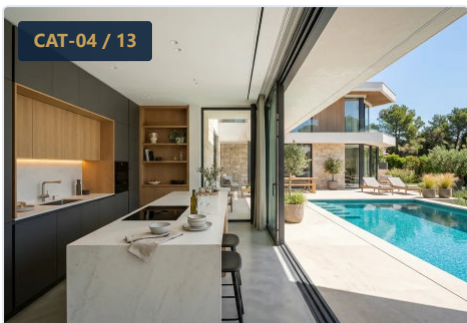

INTERIORS & POOL SYSTEMS

Modular Kitchen & Bath Cabinetry, House Plans & Turnkey Pool Systems

Factory-engineered modular kitchen cabinetry, moisture-resistant bathroom vanities, multidisciplinary architectural house plan packages, and complete turnkey residential and hotel swimming pool electromechanical equipment coordinated through the DEKSACH d.o.o. European Union trade desk.

Export & Project Scope: Multi-unit villa and apartment kitchen/vanity fit-outs, architectural/structural/MEP residential design blueprints, and skimmer or overflow swimming pool filtration, disinfection, heating, and lighting packages.

TECHNICAL SPECIFICATIONS

Modular Kitchen Cabinetry	18 mm E1 moisture-resistant MDF/chipboard carcasses; UV high-gloss acrylic, membrane, CNC-lacquered or wood-veneer fronts
Bathroom Vanities & Hardware	Water-resistant PVC/lacquered suspended vanities, ceramic/quartz tops, LED anti-fog mirrors & soft-close hinges/tandem drawers
Architectural House Plans	Custom 2D/3D architectural floor plans, structural engineering calculations, MEP schematics & material BOQ schedules
Pool Filtration & Circulation	Bobbin-wound/laminated sand filters, self-priming commercial/residential pool pumps, salt chlorinators, UV & automatic pH/ORP dosing
Pool Finishes & Heating	1.5 mm reinforced PVC pool liners, glass/porcelain pool mosaics, RGBW IP68 LED underwater lights, stainless ladders & inverter heat pumps

KEY SUPPLY ADVANTAGES

- Flat-pack or pre-assembled modular kitchens and bathroom vanities pre-drilled on CNC lines for rapid site installation
- Integrated architectural, structural, and MEP house plan engineering tailored to plot climate and developer budgets
- Complete residential villa and 5-star resort swimming pool machine-room, filtration, heating, and liner/mosaic packages

Web Spec Sheet: <https://deksach.eu/product/kitchen-bathroom-cabinets-turnkey-pools/>

CAT-04 / 14



CCTV & SITE HARDWARE

IP/HD-TVI CCTV Surveillance Systems & Construction Site Tools

High-definition IP PoE and HD-TVI CCTV surveillance cameras, AI-enabled NVR/DVR recording systems, and heavy-duty construction site hand tools and consumables including wheelbarrows, shovels, trowels, rakes, and EN 12413 abrasive cutting and grinding discs supplied in wholesale volume by DEKSACH d.o.o.

Export & Project Scope: Commercial building, warehouse, and jobsite electronic perimeter surveillance, paired with wholesale hardware distribution and EPC contractor site tool and abrasive consumable packages.

TECHNICAL SPECIFICATIONS

CCTV Cameras (IP & HD-TVI)	4 MP–8 MP (4K) bullet, dome & 25x–36x PTZ cameras, full-color night vision, IR 30–150 m, IP67 weatherproof & IK10 vandal-proof
NVR / DVR Recording Units	8 / 16 / 32 / 64-channel H.265+ PoE NVRs & hybrid XVR/DVRs, multi-bay SATA RAID support, smart perimeter & VMS mobile access
Wheelbarrows & Earth Tools	85 L–110 L heavy-gauge galvanized/powder-coated steel tray wheelbarrows (pneumatic/PU solid wheel), tempered carbon-steel shovels & rakes

KEY SUPPLY ADVANTAGES

- ONVIF-compliant PoE IP and hybrid HD-TVI surveillance ecosystems with smart motion analytics and remote fleet monitoring
- Export-packed dismantled wheelbarrows (tray, frame, wheel nested) allowing high-density container load quantities
- Heat-treated forged shovels, rakes, and ergonomic masonry trowels built for rugged civil construction sites

Web Spec Sheet: <https://deksach.eu/product/cctv-security-systems-construction-tools/>

STRUCTURED B2B PROCUREMENT

Submit your Bill of Quantities (BOQ), architectural drawings, target destination port, and preferred Incoterms directly to our corporate trade desk for a formal proforma quotation.

STEP 01

Share product codes, quantities, architectural plans, or commodity grade specifications with destination port details.

STEP 02

Receive a detailed commercial offer including technical datasheets, container loading plan, production lead time, and CIF/FOB pricing.

STEP 03

Execute standardized international sales contracts through DEKSACH d.o.o. with structured bank payment instruments.

STEP 04

Third-party pre-shipment verification, export customs clearance, EUR.1 / Certificate of Origin, and containerized sea/air dispatch.

OFFICIAL CORPORATE HEADQUARTERS & DIRECT TRADE DESK COORDINATES

LEGAL CONTRACTING ENTITY

DEKSACH d.o.o.

REGISTERED HEADQUARTERS

Savska 32, HR 10000 Zagreb — Hrvatska-Croatia

DIRECT GSM & WHATSAPP DESK

+385 91 751 72 61

CORPORATE EMAIL & ONLINE RFQ

deksach@deksach.eu

ONLINE DIVISION PORTAL

<https://deksach.eu/catalog/construction-electrical-materials/>

24/7 B2B QUOTATION PORTAL

<https://deksach.eu/rfq/>